


COMBiLiFT
LIFTING INNOVATION

C-SERIES


C3500-C5000 mk 2

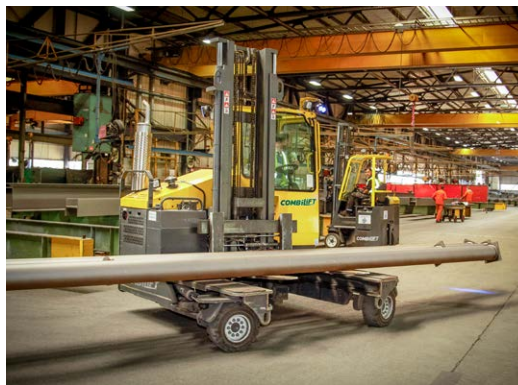



The multi-directional forklift designed for the safe, space saving and productive handling of long and bulky loads.

C3500-C5000 Mk 2

FRONTAL MODE

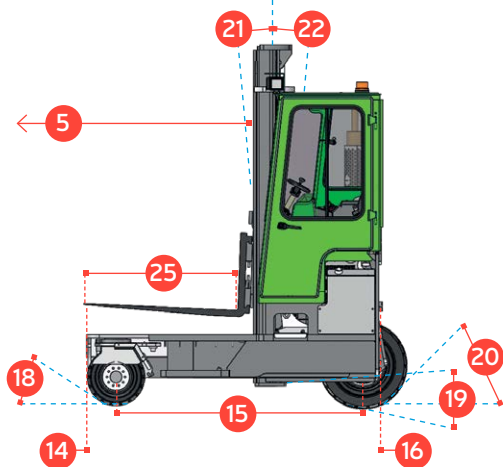

SI DEWARD MODE

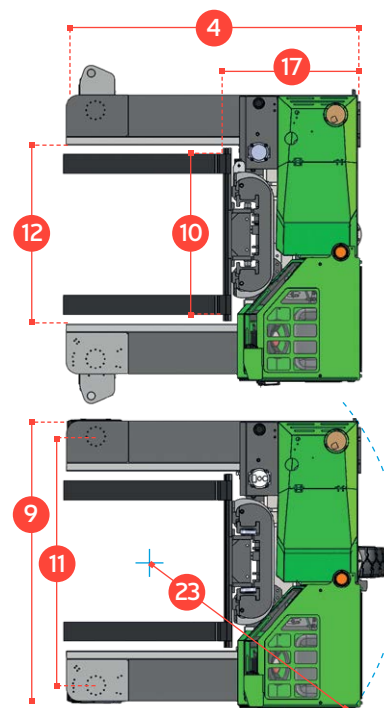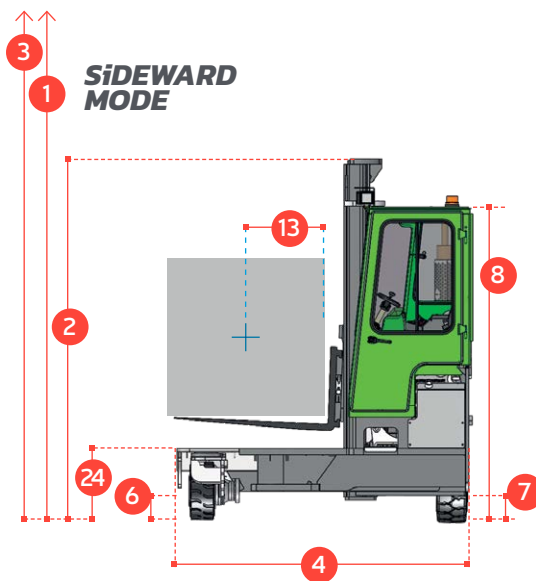

REF.	DESCRIPTION	C3500	C4000	C5000
1a	Max. Lift Height		4040 mm	
1b	Freelift Height		0mm	
2	Height Mast Closed		2855 mm	
3	Max. Mast raised		4870 mm	
4	Overall Length	1950 mm	2300 mm	2500 mm
5	Mast Travel	950 mm	1300 mm	1400 mm
6	Ground Clearance Under Mast		150mm	
7	Ground Clearance to Centre of Wheelbase	200 mm	200 mm	100 mm
8	Height Over Cab (Without work lights)		2435 mm	
9	Width		2190 mm	
10	Outside Spread of Fork Arms		1350 mm	
11	Track Front		1980 mm	
12	Frame Opening		1400 mm	
13	Load Centre Distance		600 mm	
14	Overhang Front		245mm	
15	Wheelbase	1600 mm	1950 mm	2535 mm
16	Overhang Back		140 mm	
17	Length From Face of Fork	1100 mm	1100 mm	1140 mm
18	Approach Angle		45°	
19	Ramp Angle		29°	
20	Departure Angle		45°	
21	Forward Tilt		3°	
22	Backward Tilt		5°	
23	Minimum Outside Radius	2000 mm	2325 mm	2490 mm
24	Platform Height		545 mm	
25	Platform Length	850 mm	1200 mm	1350 mm
A	Capacity	3500 kg	4000 kg	5000 kg
B	Unladen Weight	6050 kg	6300 kg	6800 kg
C	Maximum Ground Speed		15 km/h	
D	Gradeability		15%	
E	Kubota V2403 T Diesel / WG 2503 LPG		44 kW / 46 kW	
F	Electrics		12 Volt	
G	Fork Section 150mm x 50mm x	850 mm	1200 mm	1350 mm
H	200 / 50 x 10 Front Tyre		OD450mm / Width 200 mm	
I	27 x 10 - 12 Rear Tyre		OD680mm / Width 255mm	
J	Standard Colour		Green and Grey	
K	Suspension Seat		KAB Model 116	

Multi-Directional



Features Include:

Features Include:

- Rubber Mounted Cabin
- Multi-Directional Operation
- 3 Wheel Hydrostatic Drive
- Load Sensing Steering
- 4 Way Lever Positioning of Wheels
- Hydraulic Oil Cooler

Distributed by:

International Patent Application No. PCT/EP2014/053066; UK Patent Application No. GB 1302811.3

CO. MONAGHAN +353 47 80500
IRELAND INFO@COMBILIFT.COM

combilift.com

Combilift has a policy of continuous product development and reserves the right to alter specifications without prior notice. Specifications and/or dimensions may vary from those illustrated in some countries.