

COMBi CUBE

With a wealth of innovative new features such as intelligent seat rotation and our proprietary Dynamic 360® Steering System, the Combi-Cube is the next generation counterbalance forklift.

COMBiLiFT

LIFTING INNOVATION




Optional: Fully Enclosed Cab



COMBi CUBE

FRONTAL MODE

SiDEWARD MODE

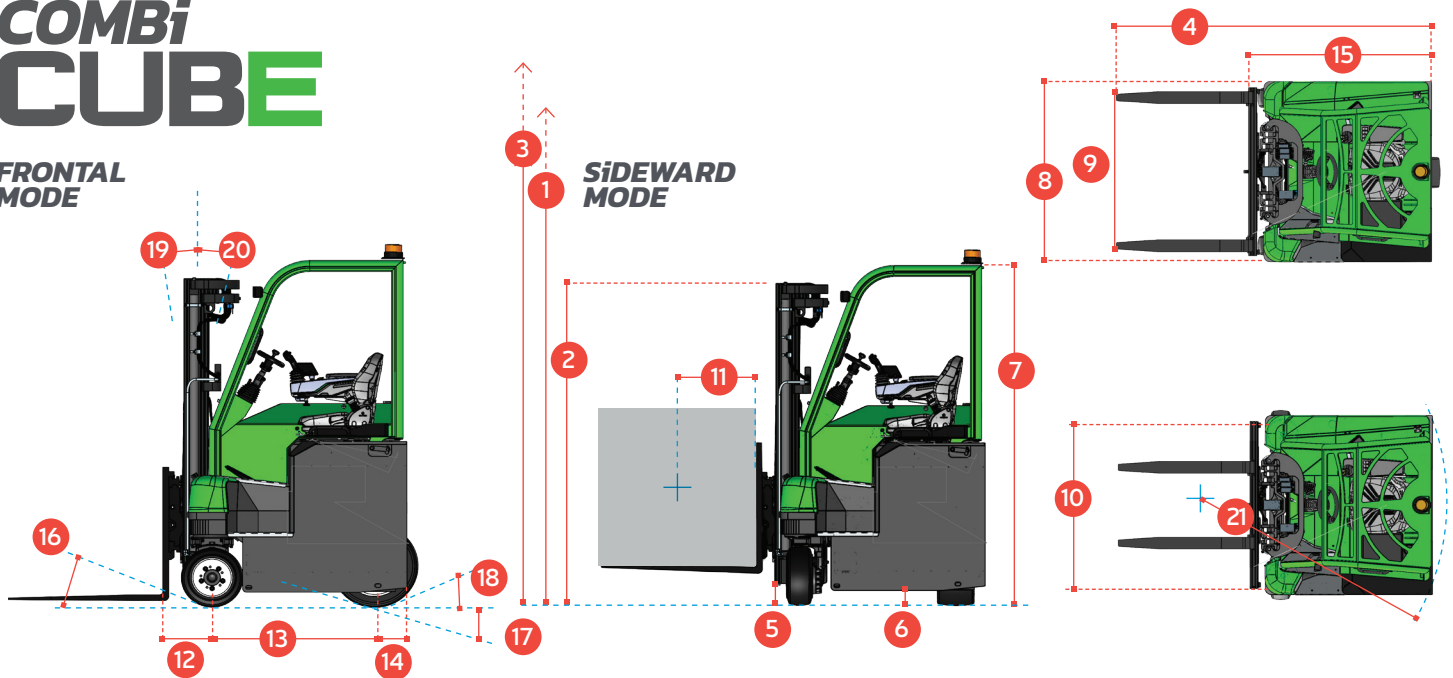

REF.	DESCRIPTION	STD	OPTIONAL			
		DUPLEX	DUPLEX	DUPLEX	TRIPLEX	
1 a	Standard Lift Height	4000mm	4550 mm	5050 mm	5500 mm	
1 b	Free Lift Height	0 mm	1980 mm	2230 mm	1481 mm	
2	Height Mast Closed	2610 mm	2910 mm	3160 mm	2410 mm	
3	Max. (Mast raised)	4900 mm	5450 mm	5950 mm	6400 mm	
4	Overall Length		2640 mm			
5	Ground Clearance Under Mast		125 mm			
6	Ground Clearance at Rear Corner		130 mm			
7	Height of Overhead Guard		2400 mm			
8	Width		1500 mm			
9	Outside Spread of Fork Arms		1325 mm			
10	Track Front		1186 mm			
11	Load Centre Distance		600 mm			
12	Overhang Front		320 mm			
13	Wheelbase		1048 mm			
14	Overhang Back		208 mm			
15	Length From Face of Fork		1585 mm			
16	Approach Angle		30°			
17	Ramp Angle		15°			
18	Departure Angle		30°			
19	Forward Tilt		3°			
20	Backward Tilt		5°			
21	Minimum Outside Radius		1400 mm			
A	Capacity		3000 kg			
B	Unladen Weight		6750 kg			
C	Maximum Ground Speed		12 km/h			
D	Gradeability		10%			
E	Battery Capacity		48 V / 930 Ah			
F	AC Electric Traction Motor x 2		48 V / 8.7 kW			
G	AC Electric Pump Motor		48 V / 14 kW			
H	Fork Section		125 mm x 50 mm x 1065 mm			
I	16 x 7 – 10.5 Front Tyre x 2		OD 406 mm / Width 178 mm			
J	22 x 10 x 16 Rear Tyre x 1		OD 559 mm / Width 254 mm			
K	Standard Colour		Eco Green and Grey			
L	Suspension Seat		Grammer MSG 65			

- Design Copyright No. – 015019216-0001
- Design Copyright No. – 015019216-0002
- Patent Pending No. PCT/EP2024/059718

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.

Optional: Intelligent Seat Rotation

The CUBE's patent pending swivel seat automatically swivels 15° to the left or right with the selected direction of travel, maximising driver visibility and reducing strain when travelling in reverse.



Features Include:

- Ergonomic cabin
- Multi-directional operation
- Powered by AC technology
- Dynamic 360° Steering
- Rubber Mounted Cabin
- Centrally Positioned Operator
- 2 Interchangeable Rollout Batteries

2 Interchangeable Rollout Batteries

