

COMBi-STE 2500-4000

The multi-directional, electric, stand-on forklift designed for the safe, space saving and productive handling of long and bulky loads.

COMBiLiFT


LIFTING INNOVATION





combilift.com

COMBi-STE 2500-4000

FRONTAL MODE

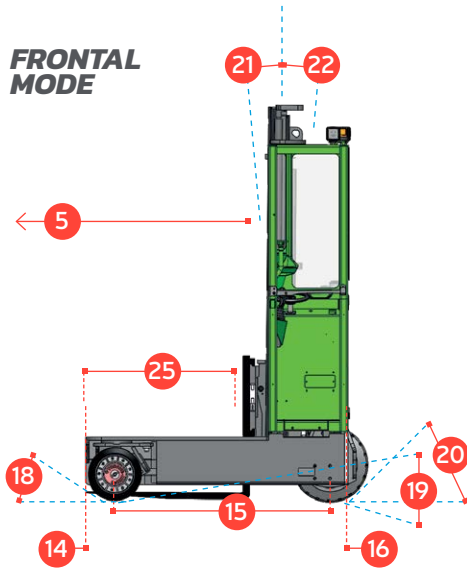


SI DEWARD MODE

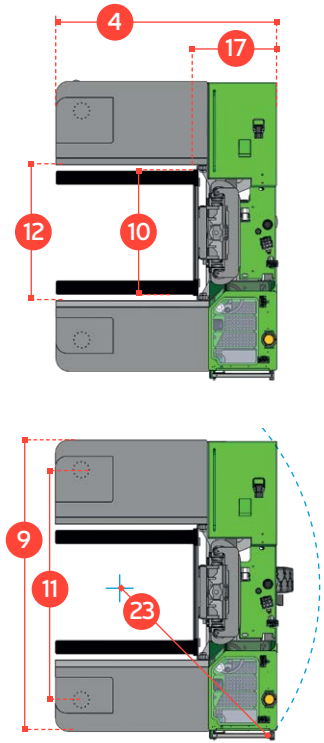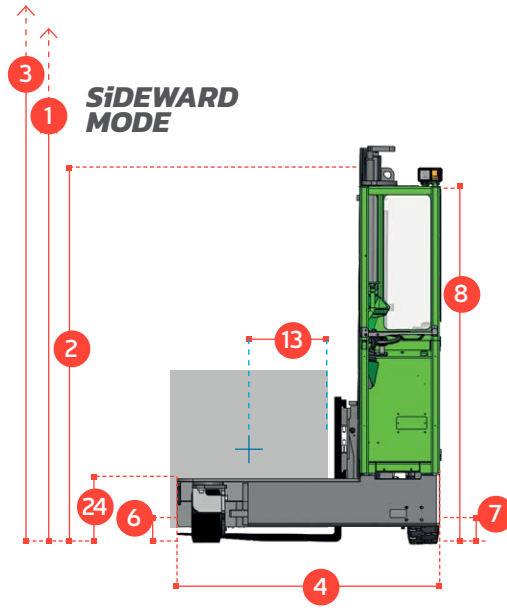

REF.	DESCRIPTION	2500	3000	4000
1a	Max. Lift Height		4040mm	
1b	Freelift Height		0mm	
2	Height Mast Closed		2830mm	
3	Max. (Mast raised)		5185mm	
4	Overall Length	2000mm		2100mm
5	Mast Travel		1300mm	
6	Ground Clearance Under Mast		230mm	
7	Ground Clearance to Wheelbase		150mm	
8	Height Over Cab (Without work lights)		2730mm	
9	Platform Width	2645mm		2914mm
10	Outside Spread of Fork Arms	1150mm		1350mm
11	Track Front	2085mm		2305mm
12	Frame Opening	1230mm		1500mm
13	Load Centre Distance		600mm	
14	Overhang Front		235mm	
15	Wheelbase	1580mm		1730mm
16	Overhang Back		135mm	
17	Length From Face of Fork	800mm		900mm
18	Approach Angle		45°	
19	Ramp Angle		17°	
20	Departure Angle		45°	
21	Forward Tilt		4°	
22	Backward Tilt		4°	
23	Minimum Outside Radius	1870mm		2000mm
24	Platform Height		480mm	
25	Platform Length		1200mm	

Multi-Directional

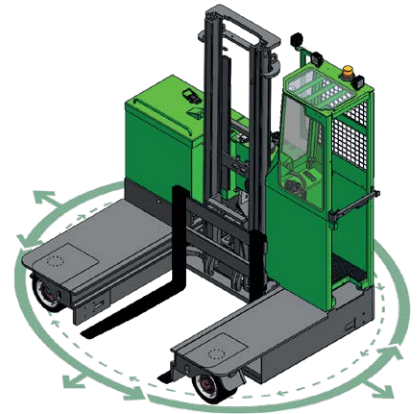

Features Include:

- Rubber Mounted Cabin
- Multi-Direction Operation
- AC Motor Technology
- Load Sensing Steering
- 2 Wheel Electric Drive
- Stand-up Operator
- (Sit Down Cabin Option Available)

Distributed by:

A	Capacity	2500 kg	3000 kg	4000 kg
B	Unladen Weight	6250 kg	6450 kg	6650 kg
C	Maximum Ground Speed		10 km/h	
D	Gradeability		10%	
E	Battery Capacity		80 V / 465 Ah	
F	Fork Section	125 x 50 x 1200mm		150 x 50 x 1200mm
G	405 / 305 - 260 Front Tyre (Solid)		OD 405mm / Width 260mm	
H	23 x 10 - 12 Rear Tyre (Super Elastic)		OD 580mm / Width 240mm	
I	Standard Colour		Green & Grey	
J	AC Electric Traction Motor x 2		80 V / 5 kW	
K	AC Electric Pump Motor		80 V / 19 kW	

PCT Patent Application No. PCT/EP2014/053066; UK Patent Application No. GB1302811.3

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.